

Gusto Drive Unit

Reliable Ventilation, Simplified

The Gusto is built for smooth, dependable greenhouse ventilation. With an intuitive motor configuration, durable construction, and low-maintenance design, it delivers full vent travel and consistent performance growers and installers can count on.



SPECIFICATIONS

- Gear Motor: 115V / 1PH / 15HP / 120V; 60Hz; 2.5 amps – TEFCG
- Motor Design: Ball bearing motor with copper windings, Class B insulation
- Certification: CSA approved
- Gear Reducer: Total reduction 1350:1; 1.2 RPM final output
- Output Torque: 2160 in-lb torque
- Capacity: Lifts up to 325 ft of 4 ft polycarbonate roof ridge vent or 400 ft of 4 ft polycarbonate side vent
- Duty Rating: Continuous duty
- Output Shaft: 1-3/8" output coupling shaft

WHY CHOOSE GUSTO?

- **Easy to Install** – Motor configuration simplifies setup and ensures proper alignment.
- **Full Vent Travel** – Reliable performance for maximum airflow.
- **Low Maintenance** – Sealed-for-life design keeps downtime minimal.
- **Built to Last** – Durable materials and superior heat dissipation extend service life.

Find out more



800.821.5829 sales@wadsworthcontrols.com
www.wadsworthcontrols.com

WHAT SETS WADSWORTH APART


- **Continuous Duty**
Runs as long as needed, even under heavy use, for dependable year-round ventilation.
- **Mechanical Torque Protection**
Automatically shuts off if the vent is obstructed, preventing damage and keeping your system safe.
- **One Call Support**
Wadsworth provides both the drive unit and the vent control, making service and troubleshooting simple — one system, one call.
- **Installer-Friendly**
Designed for quick setup. If direction needs adjusting, installers simply switch two wires — no complicated rewiring.

FEATURES AND BENEFITS

- **Thermal overload protection with automatic reset**
Protects the motor and ensures continuous duty without interruptions.
- **Quick reversing capability**
Allows fast, smooth direction changes for better ventilation control.
- **Worm gear with tapered roller bearings, dual shafts, sealed in synthetic oil**
Provides durable, long-lasting performance with reduced wear.
- **Dual output shaft**
Offers flexibility for a variety of installation configurations.
- **Sealed for life; limited or no maintenance required**
Reduces service needs and lowers long-term costs.
- **Superior heat dissipation through fin and casting design**
Extends motor life and maintains reliable operation in demanding conditions.

How does Gusto compare to the VC series?


These two drive units may be used interchangeably

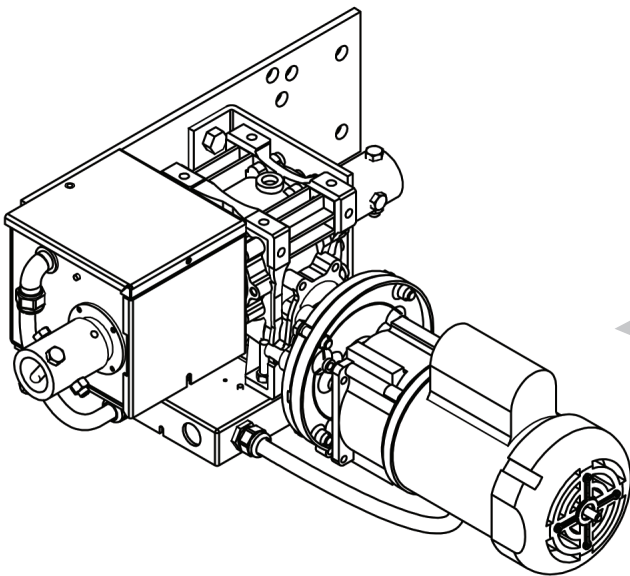

VC-2000 Drive Unit

SPECIFICATIONS

- Voltage: 120 V
- RPM: 1.2 and 3
- Amps: 2.5A
- Continuous duty: Yes

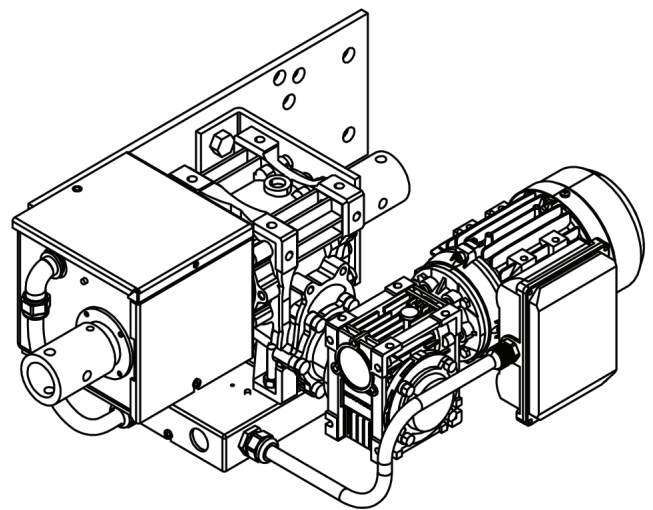

Gusto Drive Unit

SPECIFICATIONS

- Voltage: 120 V
- RPM: 1 and 2.68
- Amps: 2.5A
- Continuous duty: Yes

Find out more



800.821.5829 sales@wadsworthcontrols.com
www.wadsworthcontrols.com